

CADDY®

Mechanical Hangers and Supports for Plumbing, HVAC and Fire Protection



ERICO®



CADDY SPEED LINK



CADDY® SPEED LINK is available in 2 mm and 3 mm wire rope. The 2 mm (0.079 in.) wire rope supports static loads up to 45 kg (100 lbs). The 3 mm (0.118 in.) wire rope handles static loads up to 90 kg (200 lbs). Both systems have a 5-to-1 safety factor.

The unique steel locking device on CADDY SPEED LINK accommodates both 2 mm and 3 mm wire rope. The lock can be released with the included release tool or with a small screwdriver.

The CADDY SPEED LINK system is available in 1 m (3.3 ft), 2 m (6.6 ft), 3 m (9.9 ft), 5 m (16.4 ft) and 10 m (32.8 ft) lengths. It supports a wide-range of applications including cable tray, lighting, ductwork, pipe and tube, conduit, strut profiles and signage from overhead structural building members.

Greater lengths can be achieved by stringing two or more systems together with the use of locking devices.

Features:

- Reduces installation time and inventory
- Works with a variety of CADDY® Fasteners or as a stand-alone system without drilling into the building structure
- Increases installation versatility by allowing objects to be hung at an angle
- Allows for easy adjustments of supported objects both during and after installation
- Minimizes vibration and system wear and tear with a strong, yet flexible wire rope
- Holds working loads of up to 90 kg (200 lbs) with a 5:1 safety factor

CADDY SPEED LINK Applications



With cable tray



With ductwork





CADDY® 250 MACROFIX M8/M10


2 screw pipe clip with M8 boss/M10

- EPDM rubber insulation for sound reduction compliant with DIN 4109
- M6 multifunction screw with hexagonal combination head (slot & crosshead), c/w retaining washer
- Surface finish: electro zinc plated



- steel profile (B x S)
- for pipe diameter from 12 - 315 mm
- Temperature rating from -50°C up to +110°C
- fire rating B2 acc. to DIN 4102

N ^o	Ø	d mm	B x S mm	Sc x L			kg/1
596460	1/4	12-15	20x1,5	M6x20	1000	100	0,05
596470	3/8	15-19	20x1,5	M6x20	1000	100	0,06
596480	1/2	20-24	20x1,5	M6x20	1000	100	0,06
596490	3/4	25-30	20x1,5	M6x20	1000	100	0,07
596500	1	32-37	20x1,5	M6x20	1000	100	0,08
596510	1 1/4	40-45	20x1,5	M6x25	1000	50	0,10
595859		44-49	20x2,0	M6x25	1300	50	0,10
595860	1 1/2	48-53	20x2,0	M6x25	1300	50	0,10
595870		54-58	20x2,0	M6x25	1300	50	0,10
595880	2	59-63	20x2,0	M6x25	1300	50	0,11
595885		62-64	20x2,0	M6x25	1300	50	0,13
596450		68-73	20x2,0	M6x25	1300	25	0,19
595890	2 1/2	75-80	20x2,0	M6x25	1300	25	0,20
595900		82-86	20x2,0	M6x25	1300	25	0,20
595910	3	89-91	20x2,0	M6x25	1300	25	0,21
595920		95-103	23x2,5	M6x25	1300	25	0,22
595930	4	108-116	23x2,5	M8x25	2200	25	0,24
595940		121-127	23x2,5	M8x25	2200	25	0,30
595980		129-135	23x2,5	M8x25	2200	25	0,31
595950	5	135-141	23x2,5	M8x25	2200	25	0,32
595960		159-162	23x2,5	M8x25	2200	25	0,35
595970	6	165-168	23x2,5	M8x25	2200	25	0,37
595971		198-202	25x3,0	M8x25	2500	10	0,37
595972		210-215	25x3,0	M8x25	2500	10	0,46
595973	8	216-220	25x3,0	M8x25	2500	10	0,48
595990		225	30x3,0	M8x25	2700	10	0,50
595991		250	30x3,0	M8x25	2700	10	0,52
595992		274-280	30x3,0	M8x25	2700	10	0,54
595993		315	30x3,0	M8x25	2700	10	0,56

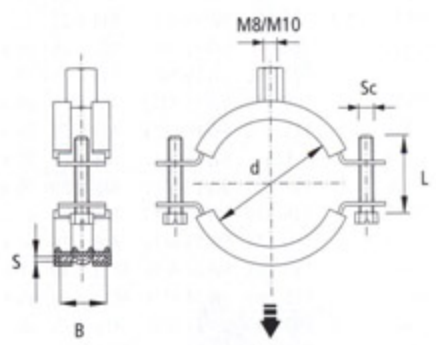

SWIVEL LOOP HANGER 100

Heavy Duty Adjustable Band Hanger


- Size Range: 1/2" through 8"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- Features a retained insert nut to ensure that the loop hanger and insert nut stay together
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)

NEW



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1000050EG	1/2"	3/8"	2-3/4"	1"	300
1000075EG	3/4"	3/8"	3-1/16"	1"	300
1000100EG	1"	3/8"	3-5/16"	1"	300
1000125EG	1-1/4"	3/8"	3-9/16"	1"	300
1000150EG	1-1/2"	3/8"	3-13/16"	1"	300
1000200EG	2"	3/8"	4-1/4"	1"	300
1000250EG	2-1/2"	1/2"	5-5/8"	1-1/4"	1000
1000300EG	3"	1/2"	6-9/16"	1-1/4"	1000
1000350EG	3-1/2"	1/2"	7"	1-1/4"	1000
1000400EG	4"	5/8"	7-3/4"	1-5/16"	1100
1000500EG	5"	5/8"	9-1/8"	1-5/16"	1100
1000600EG	6"	3/4"	10-5/8"	1-9/16"	1250
1000800EG	8"	7/8"	13-1/8"	1-5/8"	1250

3/4" - 8" 1/2" - 8"



LOOP HANGER SURGE RESTRAINT LHSR6

Heavy Duty Adjustable Band Hanger

- Size Range: fits 1/2" through 2" model 100 loop hangers
- Surface Finish: CADDY® COAT Black
- Restricts the upward surge movement of activated fire sprinkler systems
- Meets NFPA® 13 requirements
- One size fits 1/2" thru 2" sizes of the model 100 loop hanger
- Grips the loop hanger – not the nut – allowing fine tuning for height adjustment
- Installs without tools

NEW




SWIVEL LOOP HANGER 115

Adjustable Band Hanger with NFPA Rod Sizes

- Size Range: 2-1/2" through 8"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- Manufactured to use the minimum rod size permitted by NFPA for fire sprinkler piping
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1150250EG	2-1/2"	3/8"	5-9/16"	1"	525
1150300EG	3"	3/8"	6-9/16"	1"	525
1150350EG	3-1/2"	3/8"	7-1/16"	1"	585
1150400EG	4"	3/8"	7-9/16"	1"	650
1150500EG	5"	1/2"	9-3/16"	1-1/4"	1000
1150600EG	6"	1/2"	11-5/16"	1-1/4"	1000
1150800EG	8"	1/2"	12-7/8"	1-1/4"	1000

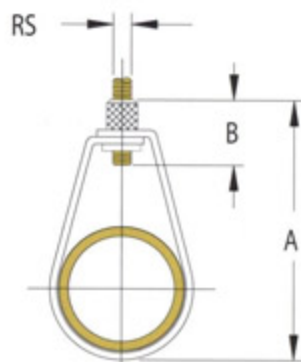


"C" And "Z" Purlin Clips


Features

- One fastener fits flanges 1/16" to 1/4".
- Supports wire or rod from bar joist, C Purlin (VF14) or Z Purlin (AF14).
- Installs from floor with VAFT tool and conduit.

NOTE: VF for vertical flange only. AF for angle flange only.
Installation tool part number VAFT.

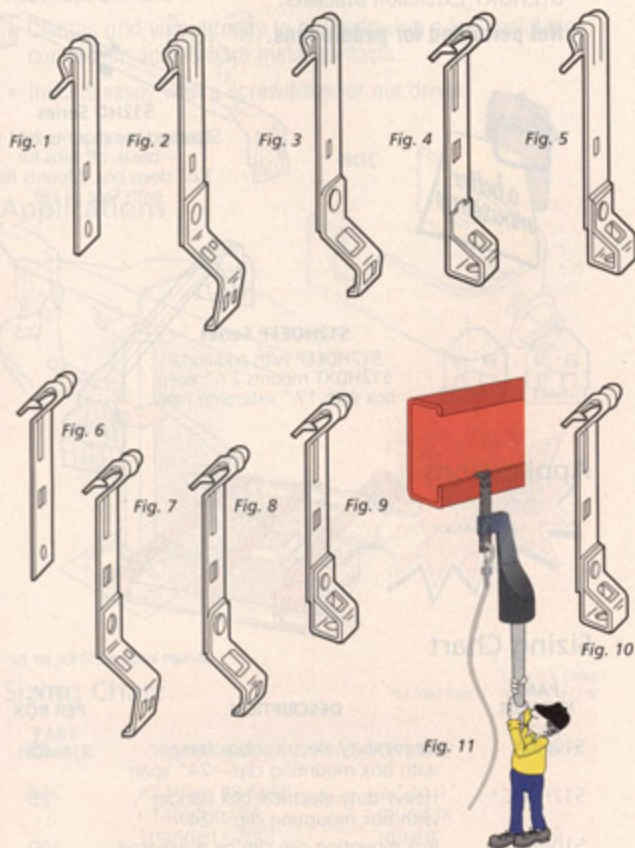

Applications

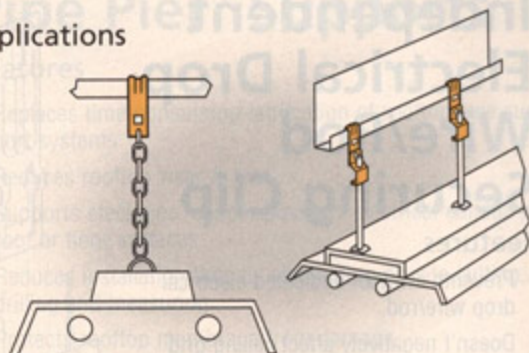

Sizing Chart

Static Load Limit: VF14 160 lbs. - AF14 100 lbs.

PART NUMBER	FIG. NO.	DESCRIPTION	QTY. PER BOX
VF14	1	1/16" to 1/4" vertical flange for wrap wire, "S" hooks, bolting straps, WMX6	100
VF14708	2	1/16" to 1/4" to #8 wire or 1/4" plain rod	100
VF146A	3	1/16" to 1/4" to 1/8" plain rod	100
VF144TI	4	1/16" to 1/4" to 1/4" threaded rod	100
VF146TI	4	1/16" to 1/4" to 1/8" threaded rod	100
VF146T	5	1/16" to 1/4" to 1/8" threaded rod (nuts required)	100
AF14	6	1/16" to 1/4" Z Purlin for wrap wire, "S" hooks, bolting straps, WMX6	100
AF14708	7	1/16" to 1/4" to #8 wire or 1/4" plain rod	100
AF146A	8	1/16" to 1/4" to 1/8" plain rod	100
AF144TI	9	1/16" to 1/4" to 1/4" threaded rod	100
AF146TI	9	1/16" to 1/4" to 1/8" threaded rod	100
AF146T	10	1/16" to 1/4" to 1/8" threaded rod (nuts required)	100
VAFT	11	Installation tool for VF & AF assemblies	1

Sizing Chart

PART NUMBER	FIG. NO.	DESCRIPTION	QTY. PER BOX
VF14	1	1/16" to 1/4" vertical flange for wrap wire, "S" hooks, bolting straps, WMX6	100
VF14708	2	1/16" to 1/4" to #8 wire or 1/4" plain rod	100
VF146A	3	1/16" to 1/4" to 1/8" plain rod	100
VF144TI	4	1/16" to 1/4" to 1/4" threaded rod	100
VF146TI	4	1/16" to 1/4" to 1/8" threaded rod	100
VF146T	5	1/16" to 1/4" to 1/8" threaded rod (nuts required)	100
AF14	6	1/16" to 1/4" Z Purlin for wrap wire, "S" hooks, bolting straps, WMX6	100
AF14708	7	1/16" to 1/4" to #8 wire or 1/4" plain rod	100
AF146A	8	1/16" to 1/4" to 1/8" plain rod	100
AF144TI	9	1/16" to 1/4" to 1/4" threaded rod	100
AF146TI	9	1/16" to 1/4" to 1/8" threaded rod	100
AF146T	10	1/16" to 1/4" to 1/8" threaded rod (nuts required)	100
VAFT	11	Installation tool for VF & AF assemblies	1